



VHF/UHF Band plans are a local option and generally published by the local coordinating bodies. These band plans show differentiate weak signal, satellite, packet, simplex, repeater and crossband repeater areas.

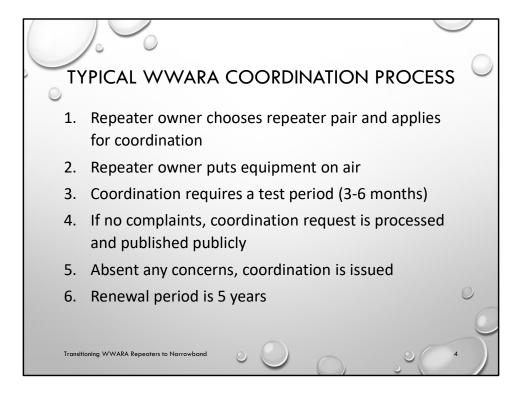

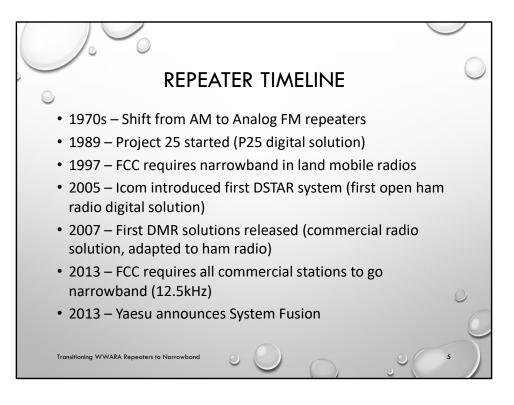


Let's take a step back in time and look at the history of repeaters a little bit. Most of us weren't around for the first two shifts. It's clear from reading old issues of 73' magazine that it wasn't entirely a smooth transition from AM to FM in the early days. Now fast forward to the early 2000's (2005) when Icom came out with the first 'ham radio specific' digital mode called DSTAR. This was a pretty big deal at the time and Icom put a lot of money into making it happen. This was also about the time that internet connectivity was widely available in most parts of the US, so when a couple different groups of hams figured out how to 'connect' DSTAR repeaters, things blew up. People could talk to hams in other states and countries with an HT.

Fast forward another 5 to 10 years and DMR (or MotoTurbo) has gotten a strong foothold in the commercial space, but more importantly the Chinese start producing the \$40 HT's and another explosion of digital happens. Along with the cheap handhelds, the first generation of Motorola repeaters are starting to show up on the surplus market and another group of industries hams figures out how to adapt it to ham radio. (minus the nice benefits like using call signs in the protocol)


The final piece of the puzzle is the FCC mandate that said all commercial radios

must be narrowband capable by February 14, 1996. Amateur radios are often based on commercial platforms and many inherited this capability immediately after. The FCC required systems move to a 'narrowband' solution by January 1, 2013, which was the final nail in the coffin for wide band analog FM commercially. Additionally, many land mobile products no longer support wideband operation in the VHF/UHF spectrum. This makes it problematic to use commercial land mobile radios and repeaters in the amateur service.


Yaesu announced their System Fusion digital mode in 2013 and we can only anticipate more modes in the future. M17 is on the way. Analog narrow modes like Analog Compandored Single Sideband (ACSSB) may also reappear.

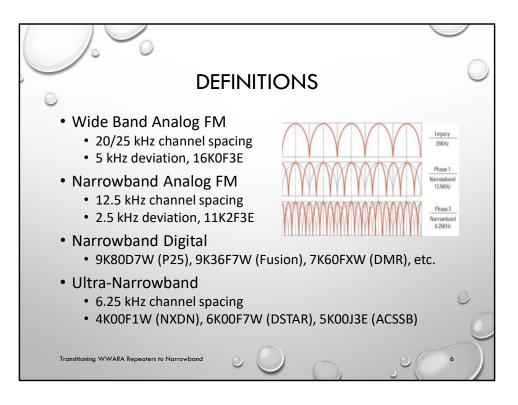


Narrowband is defined fitting into a 12.5kHz channel width. This includes the modulated signal width and some guard band space. The FCC emission designator shows the actual modulated bandwidth without channel guard space.

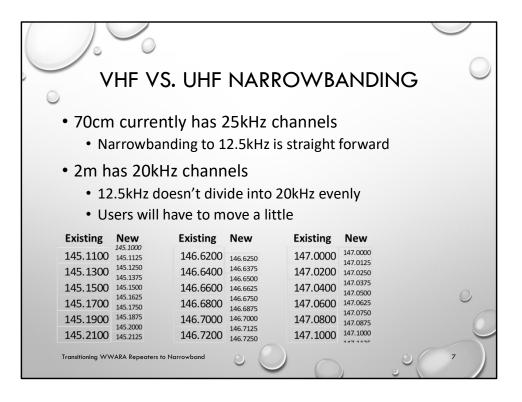


At UHF, each 25kHz channel simply becomes 2 narrowband channels. At VHF it's more complicated because the channels don't divide evenly. WWARA already migrated from 25kHz channels to 20kHz long ago to create extra channels. Approximately 4 of 5 users have to move a little. It's not entirely necessary to even retune cavities. If two adjacent users migrate to narrowband, a third channel is created.

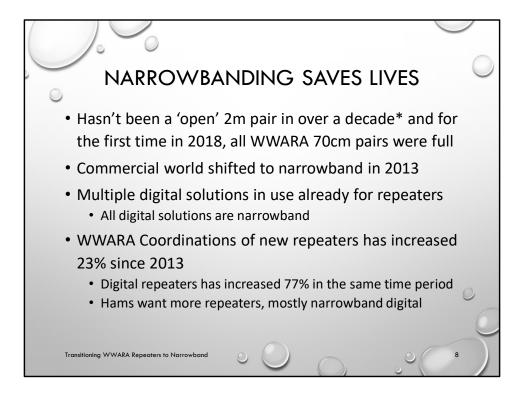

Although an occasional pair becomes available briefly, for more than a decade the best way to get a 2m pair has been to bump off a current owner. While the number of repeaters has gone up and some bands like 2m are 'full' at this point, it seems the level of activity has dropped off. There are exceptions. Some systems key down around 6am and hardly un-key until midnight each day. But many systems sit idle all week until the weekly net. Our recommendation is to use them, most repeater owners love to have their systems used, just be respectful of others and leave chances for people to join in.

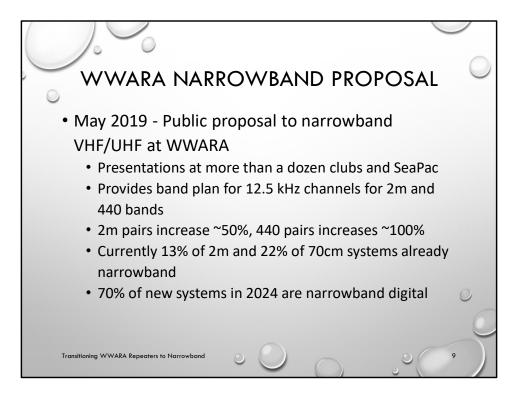


WWARA has been socializing these changes wherever possible.

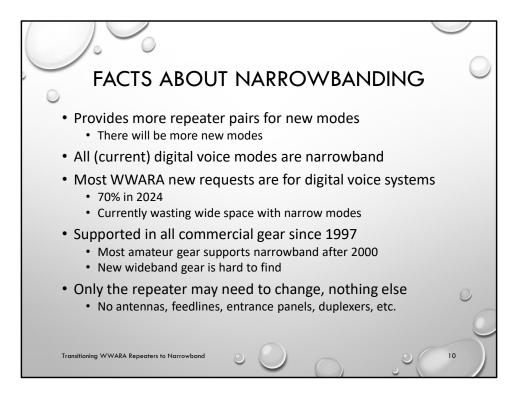

The process of moving to narrowband is happening now with additional digital voice modes. By allocating only wideband channels, we are wasting spectrum. The only wideband users are analog FM and they could also be narrowband.

Older repeaters may not support narrowband and will need to be replaced. This isn't happening immediately. There are still years to replace the repeater (if necessary) and it will be at least 30+ years old at that point.

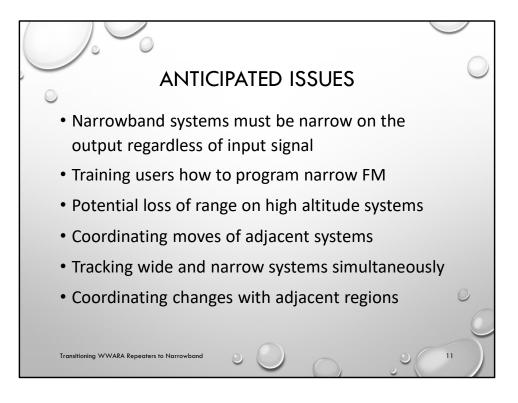

A wideband signal must be made narrow on the output to ensure it doesn't splatter onto adjacent channels. The largest issue is likely to get users to program narrow FM on repeaters, particularly as things change. It may be difficult to keep programming current. Migrating from wide to narrow FM does potentially result in a loss of range. Low level sites in Western Washington are generally terrain limited. No mode or power level will change the maximum range. Higher sites could see some reductions in coverage unless power level, antennas, feedlines or other equipment are improved. Tracking these changes against our wide and narrow band plans and minimizing interference will be a huge issue for WWARA. WWARA also has to manage issues with adjacent regions (primarily BC and Oregon).



This plan has not been accepted by the membership but has passed the WWARA board. There are still details around this which are still to be decided.

